

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 111 211 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
27.06.2001 Bulletin 2001/26

(51) Int Cl.7: **F01N 3/20, B01D 53/94,  
F02B 37/16**

(21) Application number: 00311124.2

(22) Date of filing: 13.12.2000

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **King, Edward Thomas**  
Dearborn, Michigan 48124 (US)  
• **Vanderslice, John**  
Berkley, Michigan 48072 (US)

(30) Priority: 21.12.1999 US 468499


(74) Representative: **Messulam, Alec Moses et al**  
**A. Messulam & Co. Ltd.,**  
43-45 High Road  
Bushey Heath, Bushey, Herts WD23 1EE (GB)

(71) Applicant: **Ford Global Technologies, Inc.**  
Dearborn, Michigan 48126 (US)

**(54) Exhaust gas purification system for a lean burn engine**

(57) An exhaust gas purification system for an engine equipped with a turbocharger (20) and an exhaust pipe having a NO<sub>x</sub> conversion catalyst (40) therein. The system comprises a reservoir (30) for storing pressurised air received from the turbocharger, a reductant injector (42) in fluid communication with a reductant supply (44), and a mixing chamber (36) in fluid communication with the reservoir (30) and connected to the reductant injector (42). The reductant injector (42) is responsive to an injection signal for atomising and injecting a quantity of reductant into the mixing chamber (36). The mixing chamber (36) is in fluid communication with the exhaust pipe for introducing a quantity of air and reductant mixture into the exhaust gas flow upstream of the NO<sub>x</sub> conversion catalyst (40).

cation with the reservoir (30) and connected to the reductant injector (42). The reductant injector (42) is responsive to an injection signal for atomising and injecting a quantity of reductant into the mixing chamber (36). The mixing chamber (36) is in fluid communication with the exhaust pipe for introducing a quantity of air and reductant mixture into the exhaust gas flow upstream of the NO<sub>x</sub> conversion catalyst (40).

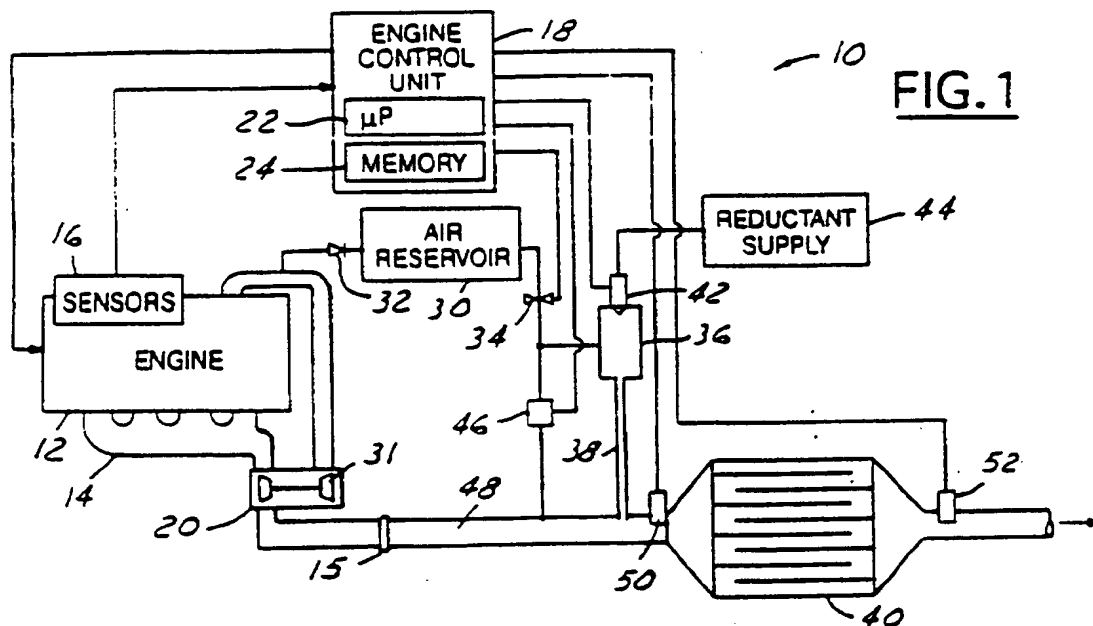**FIG. 1****EP 1 111 211 A2**

## Description

[0001] The present invention relates generally to exhaust systems for engines and, more particularly, to an exhaust after-treatment system for a low emission, lean-burn internal combustion engine.

[0002] Catalysts are generally used as a means for removing pollutants such as HC, CO and NO<sub>x</sub> from the exhaust gas of internal combustion engines. The ability of a catalyst to remove NO<sub>x</sub> in the exhaust gas falls rapidly, however, when the air-fuel ratio of the exhaust gas becomes leaner. Lean burn engines such as diesel engines, operate at overall air-fuel ratios leaner than stoichiometry. As a result, they have improved fuel economy. On the other hand, conventional three-way catalysts do not function properly at such lean air-fuel ratios because of the relatively high concentration of oxygen in the exhaust gas. For this reason, such engines are typically equipped with a lean NO<sub>x</sub> catalyst (LNC) and/or a selective catalytic reduction (SCR) catalyst.

[0003] LNC and SCR catalyst can chemically reduce NO<sub>x</sub> into the components of CO<sub>2</sub>, H<sub>2</sub>O, and N<sub>2</sub> by utilising hydrocarbons in the exhaust gas stream. To increase the NO<sub>x</sub> conversion efficiency of such exhaust gas after-treatment systems, injectors are used to inject reductants such as gasoline, diesel fuel or urea into the exhaust gas upstream of the catalyst.

[0004] The quantity of reductant injected is very small, and must be finely atomised prior to introduction in the exhaust gas flow upstream of the LNC or SRC. Conventional reductant injection systems utilise an air assisted injector in connection with a series of electrically or mechanically driven air and reductant pumps to introduce the air/reductant into the exhaust stream. Such systems have the obvious drawback of additional cost, noise and weight associated with the separate dedicated electrical or mechanical air and reductant pump system.

[0005] According to the present invention there is provided an improved exhaust gas purification for an engine equipped with a turbocharger and an exhaust pipe having a NO<sub>x</sub> conversion catalyst therein. The system comprises a reservoir for storing pressurised air received from the turbocharger, a reductant injector in fluid communication with a reductant supply, and a mixing chamber in fluid communication with the reservoir and connected to the reductant injector. The reductant injector is responsive to an injection signal for atomising and injecting a quantity of reductant into the mixing chamber. The mixing chamber is in fluid communication with the exhaust pipe for introducing a quantity of air and reductant mixture into the exhaust gas flow upstream of the NO<sub>x</sub> conversion catalyst.

[0006] In one embodiment of the invention, the system includes an engine control unit, a valve connected between the reservoir and the mixing chamber, and a differential pressure transducer positioned between the mixing chamber and the exhaust pipe for measuring the pressure differential across the mixing chamber and ex-

haust pipe upstream of the NO<sub>x</sub> conversion catalyst. The engine control unit controls the valve to introduce a quantity of pressurised air from the reservoir into the mixing chamber to maintain the pressure differential between the mixing chamber and exhaust pipe substantially constant.

[0007] One advantage of the present invention is that it eliminates the cost, weight, and durability concerns associated with a separate dedicated electrically or mechanically driven air pump.

[0008] The present invention will now be described further, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic view of an exhaust system according to one embodiment of the present invention illustrating its operational relationship with an internal combustion engine; and

Figure 2 is a logic flow diagram describing one method of operating the exhaust gas purification system of Figure 1.

[0009] Turning now to Figure 1, an exhaust gas purification system 10 is illustrated in operational relationship with a lean burn internal combustion engine 12 such as a direct injected diesel engine for an automotive vehicle. The engine 12 has an exhaust manifold 14 to direct the exhaust gases from the engine 12 through the turbocharger 20, to the exhaust system 10.

[0010] The engine 12 includes sensors, indicated generally at 16, for providing information about engine performance to the engine control unit 18. Such information includes the crankshaft position, camshaft position, accelerator pedal position, air temperature, engine coolant temperature, etc. The information from the sensors 16 is used by the engine control unit 18 to control operation of the engine 12.

[0011] The engine 12 further includes a turbocharger 20 for increasing the intake airflow and pressure supplied to the cylinders of the engine 12.

[0012] The exhaust gas purification system 10 is coupled to the turbocharger 20 by way of an exhaust flange 15.

[0013] The engine control unit 18 is preferably a microprocessor-based controller which provides integrated control of the engine 12 and exhaust gas purification system 10, among other things. Of course, the present invention may be implemented in a separate controller depending upon the particular application. The engine control unit 18 includes a microprocessor 22 in communication with input ports and output ports and associated memory 24. The memory 24 may include various types of volatile and non-volatile memory such as random access memory (RAM), read-only memory (ROM), and keep-alive memory (KAM). These functional descriptions of the various types of volatile and non-volatile storage may be implemented by a number of known physical devices including but not limited to EPROMs,

EEPROMs, PROMs, flash memory, and the like.

[0014] The exhaust gas purification system further includes a reservoir 30 which receives pressurised air from the compressor portion 31 of the engine turbocharger 20. A check valve 32 prevents the pressurised air from bleeding out of the reservoir 30 and back into the turbocharger 20. An air valve 34 delivers pressurised air from the reservoir 30 into a chamber 36. A passage 38 provides a conduit through which the pressurised air and reductant is introduced into the exhaust gas flow upstream of the LNC or SCR 40.

[0015] Reductant is introduced into the chamber 36 by the injector 42 which is supplied from a reductant supply system 44. A differential pressure transducer 46 senses the pressure differential between the chamber 36 and exhaust gas flow 48. This signal is supplied to the engine control unit 18 for use in activating the injector 42 and air valve 34.

[0016] An upstream temperature sensor 50 and downstream temperature sensor 52 are also provided upstream and downstream of the LNC or SCR 40, and communicate temperature information to the engine control unit 18.

[0017] The operation of the exhaust gas purification system will now be described with reference to Figures 1 and 2. Pressurised air from the turbocharger compressor 31 fills the reservoir 30. The check valve 32 keeps the pressurised air from bleeding out of the reservoir and back into the compressor 31. As shown in Figure 2, the engine control unit senses the upstream and downstream temperature of the catalyst 40 in step 100, by way of the upstream and downstream temperature sensors 50, 52 respectively. The upstream and downstream temperature sensors 50, 52 aid the engine control unit 18 in determining whether or not reductant is to be injected into the exhaust gas flow. For example, there are times such engine cold start operation, or extended idle, when the catalyst 40 is relatively cool and outside its prime operating mode and does not require reductant injection because of the relatively higher concentrations of unburned hydrocarbons in the exhaust gas flow. By known methods, the engine control unit 18 determines when it is necessary to add reductant to the exhaust gas flow at step 102.

[0018] Although the preferred system includes temperature sensors 50, 52, alternative exhaust system sensors may be used. For example, upstream and downstream NO sensors could be used to directly measure the catalyst conversion efficiency.

[0019] The pressure differential across the chamber 36 and exhaust gas flow 48 is sensed by the differential pressure transducer 46 at step 104, and the signal is supplied to the engine control unit 18. Based on the differential pressure measured in step 104, the engine control unit 18 determines the pressurised air flow rate required for consistent reductant metering and atomisation in step 106. From this step, the duty cycle of the air valve 34 is determined in step 108 as well as the duty

cycle of the injector 42 at step 110. Preferably, the engine control unit varies a pulse width modulated (PWM) signal to the air valve 34 to keep the pressure differential as measured by the differential pressure transducer 46 constant.

[0020] The engine control unit 18 then controls the air valve 34 and injector 42 at step 112 in accordance with the duty cycles determined in steps 108 and 110. Upon activation, reductant is injected into the chamber 36 by the nozzle 42. At the same time, pressurised air is introduced into the chamber 36 by the air valve 34. The atomised reductant and air mixture then travels along the conduit 38 and is introduced into the exhaust gas flow 48 upstream of the catalyst 40.

[0021] The upstream and downstream temperature sensors 50, 52 also serve the additional function of error detection in the exhaust gas purification system 10. For example, the temperature sensors 50 and 52 can monitor the temperature rise due to exothermic catalyst reactions and signal malfunctions in the air valve 34, injector 42, or the differential pressure transducer 46.

[0022] Although the engine control unit 18 preferably maintains the pressure differential as measured by the pressure differential transducer 46 constant, there are times when a lower pressure drop across the transducer 46 is preferred to conserve the pressurised air supply in the reservoir 30. For example, airflow into and out of the chamber 36 is desirable and necessary to ensure that the orifice at the tip of the conduit 38 does not plug with exhaust gas deposits. However, the turbocharger 20 does not necessarily deliver pressurised air to the reservoir 30 at all times. It is, therefore, necessary to meter the pressurised air from the reservoir as economically as possible. Accordingly, the engine control unit senses the exhaust gas temperature from the upstream temperature 50 as well as from engine control sensor 16 such as the engine speed, vehicle speed, and/or accelerator pedal position to infer whether the engine is at idle. While the engine is at idle or under conditions where reductant delivery is not required such as cold start operation, the engine control unit 18 modulates the PWM signal to air valve 34 to maintain a lower pressure drop across the pressure transducer 46 to conserve the pressurised air supply in the reservoir 30.

## Claims

1. An exhaust gas purification system for an engine equipped with a turbocharger (20) and an exhaust pipe having a NO<sub>x</sub> conversion catalyst (40) therein, the system comprising:

a reservoir (30) for storing pressurised air received from the turbocharger (20);  
a reductant injector (42) in fluid communication with a reductant supply (44), the reductant injector (42) responsive to an injection signal for

atomising and injecting a quantity of reductant;  
and

a mixing chamber (36) in fluid communication with the reservoir (30) and connected to the reductant injector (42), the mixing chamber (36) in fluid communication with the exhaust pipe for introducing a quantity of air and reductant mixture from the reservoir (30) and reductant injector (42) into the exhaust gas flow upstream of the NO<sub>x</sub> conversion catalyst (40).

2. An exhaust gas purification system as claimed in claim 1 further comprising a valve connected between the reservoir and the mixing chamber, the valve responsive to a valve control signal for introducing a quantity of pressurised air from the reservoir into the mixing chamber.
3. An exhaust gas purification system as claimed in claim 1 further comprising upstream and downstream temperature sensors located upstream and downstream, respectively, of the NO<sub>x</sub> conversion catalyst for monitoring the temperature differential across the NO<sub>x</sub> conversion catalyst.
4. An exhaust gas purification system as claimed in claim 1 further comprising downstream NO sensors located upstream and downstream, respectively, of the NO<sub>x</sub> conversion catalyst for determining the conversion efficiency of the catalyst.
5. An exhaust gas purification system as claimed in claim 2 further comprising a differential pressure transducer positioned between the mixing chamber and the exhaust pipe for measuring the pressure differential across the mixing chamber and exhaust pipe upstream of the NO<sub>x</sub> conversion catalyst.
6. An exhaust gas purification system as claimed in claim 5 further comprising an engine control unit including a microprocessor and associated memory, the engine control unit adapted to receive as an input the pressure differential signal from the differential pressure transducer and output the valve control signal to maintain the pressure differential across the mixing chamber and exhaust pipe upstream of the NO<sub>x</sub> conversion catalyst substantially at a desired value.
7. An exhaust gas purification system as claimed in claim 6 further comprising upstream and downstream temperature sensors located upstream and downstream, respectively, of the NO<sub>x</sub> conversion catalyst, the engine control unit being adapted to receive as inputs the upstream and downstream temperature signal from the upstream and downstream temperature sensors, respectively, and output the valve control signal and reductant injection

signal to achieve a desired level of NO<sub>x</sub> conversion in the NO<sub>x</sub> conversion catalyst.

8. An exhaust gas purification system for an engine equipped with a turbocharger and an exhaust pipe having a catalyst therein, the system comprising:

an engine control unit;  
a reservoir for storing pressurised air received from the turbocharger;  
a valve in fluid communication with the reservoir and responsive to a valve control signal for delivering a quantity of pressurised air from the reservoir;  
a reductant injector in fluid communication with a reductant supply and responsive to an injection signal for atomising and injecting a quantity of reductant; and  
a mixing chamber in fluid communication with the valve and connected to the reductant injector, the mixing chamber including an elongated conduit in fluid communication with the exhaust pipe for introducing a quantity of air and reductant mixture from the mixing chamber into the exhaust gas flow upstream of the catalyst;  
the engine control unit including logic adapted to output the valve control signal and reductant injection signal to achieve a desired level of catalyst efficiency.

9. An exhaust gas purification system as claimed in claim 8 further comprising upstream and downstream temperature sensors located upstream and downstream, respectively, of the catalyst, the engine control unit being adapted to receive as inputs the upstream and downstream temperature signal from the upstream and downstream temperature sensors, respectively, and output the valve control signal and reductant injection signal to achieve a desired level catalyst efficiency.
10. An exhaust gas purification system as claimed in claim 8 further comprising a differential pressure transducer positioned between the mixing chamber and the exhaust pipe for measuring the pressure differential across the mixing chamber and exhaust pipe upstream of the catalyst, the engine control unit adapted to receive as an input the pressure differential signal from the differential pressure transducer and output the valve control signal to maintain the pressure differential across the mixing chamber and exhaust pipe upstream of the catalyst substantially at a desired value.
11. In an exhaust gas purification system for an engine equipped with a turbocharger and an exhaust pipe having a catalyst therein, the system comprising a reservoir for storing pressurised air received from

the turbocharger, a valve in fluid communication with the reservoir and responsive to a valve control signal, a reductant injector in fluid communication with a reductant supply and responsive to an injection signal, a mixing chamber in fluid communication with the valve and connected to the reductant injector, the mixing chamber in fluid communication with the exhaust pipe, a differential pressure transducer positioned between the mixing chamber and the exhaust pipe, and an upstream and downstream temperature sensor located upstream and downstream, respectively, of the catalyst, a method for increasing the efficiency of the catalyst comprising the steps of:

determining a quantity of air to introduce into the mixing chamber from the reservoir;  
determining a quantity of reductant to be injected into the mixing chamber;  
outputting the valve control signal to activate the valve to deliver the desired quantity of pressurised air from the reservoir to the mixing chamber; and  
outputting the injection signal to activate the reductant injector to deliver the desired quantity of reductant to the mixing chamber,  
the quantity of air being such that the pressure within the mixing chamber is greater than pressure within the exhaust pipe upstream of the catalyst such that the air/reductant mixture is introduced into the exhaust pipe upstream of the catalyst to achieve a desired level of catalyst efficiency.

5

10

15

20

25

30



35

40

45

50

55

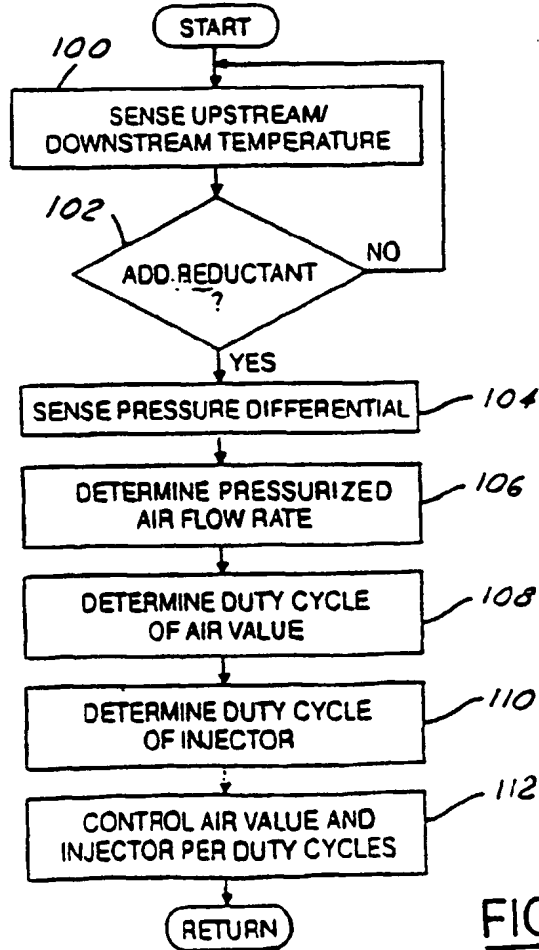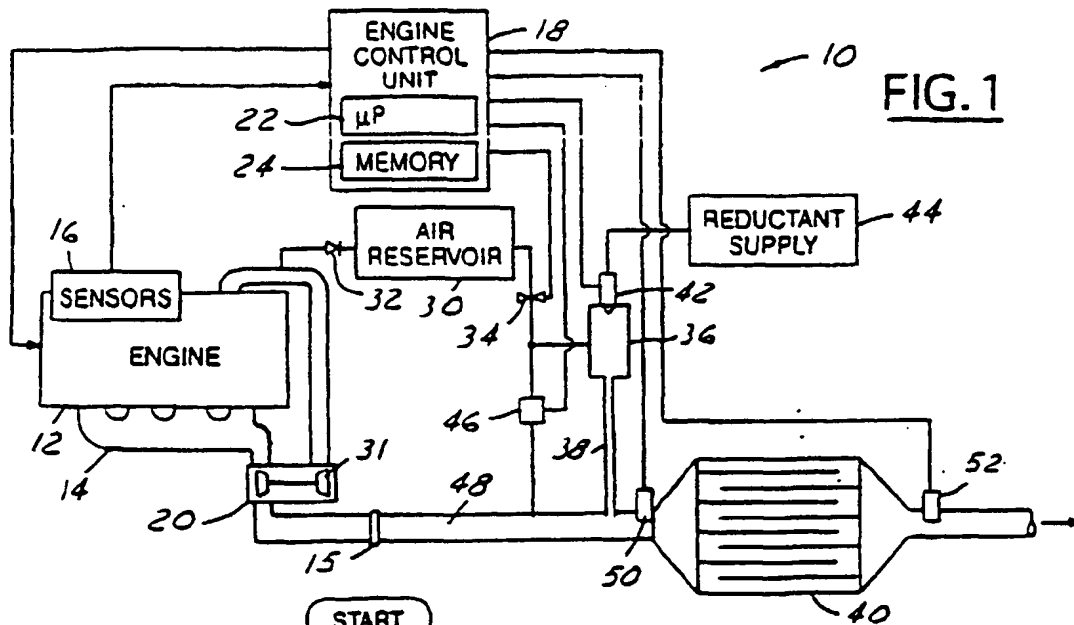

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 111 211 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
13.08.2003 Bulletin 2003/33

(51) Int Cl.7: **F01N 3/20, B01D 53/94,  
F02B 37/16**

(43) Date of publication A2:  
27.06.2001 Bulletin 2001/26

(21) Application number: **00311124.2**

(22) Date of filing: **13.12.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **King, Edward Thomas**  
Dearborn, Michigan 48124 (US)  
• **Vanderslice, John**  
Berkley, Michigan 48072 (US)

(30) Priority: **21.12.1999 US 468499**


(74) Representative: **Messulam, Alec Moses et al**  
**A. Messulam & Co. Ltd.,**  
43-45 High Road  
Bushey Heath, Bushey, Herts WD23 1EE (GB)

(71) Applicant: **Ford Global Technologies, Inc.**  
Dearborn, Michigan 48126 (US)

**(54) Exhaust gas purification system for a lean burn engine**

(57) An exhaust gas purification system for an engine equipped with a turbocharger (20) and an exhaust pipe having a NO<sub>x</sub> conversion catalyst (40) therein. The system comprises a reservoir (30) for storing pressurised air received from the turbocharger, a reductant injector (42) in fluid communication with a reductant supply (44), and a mixing chamber (36) in fluid communication with the reservoir (30) and connected to the reductant injector (42). The reductant injector (42) is responsive to an injection signal for atomising and injecting a quantity of reductant into the mixing chamber (36). The mixing chamber (36) is in fluid communication with the exhaust pipe for introducing a quantity of air and reductant mixture into the exhaust gas flow upstream of the NO<sub>x</sub> conversion catalyst (40).

cation with the reservoir (30) and connected to the reductant injector (42). The reductant injector (42) is responsive to an injection signal for atomising and injecting a quantity of reductant into the mixing chamber (36). The mixing chamber (36) is in fluid communication with the exhaust pipe for introducing a quantity of air and reductant mixture into the exhaust gas flow upstream of the NO<sub>x</sub> conversion catalyst (40).

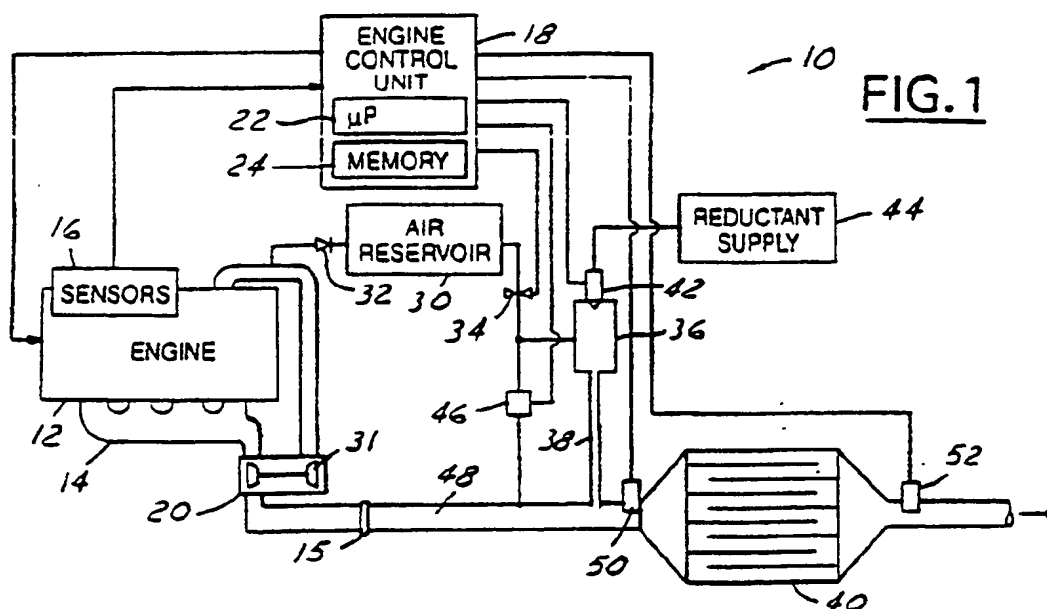**FIG. 1****EP 1 111 211 A3**



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 31 1124

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 12, 26 December 1996 (1996-12-26) & JP 08 200047 A (NISSAN DIESEL MOTOR CO LTD), 6 August 1996 (1996-08-06)	1,2,8	F01N3/20 B01D53/94 F02B37/16
Y	* abstract; figures 1-4 *	3,4,9	
Y	EP 0 898 061 A (MAN NUTZFAHRZEUGE AG) 24 February 1999 (1999-02-24) * column 11, line 43 - column 12, line 16; figure 1 *	3,4,9	
A	US 5 367 875 A (ABOUJAOUDE FRANCOIS W ET AL) 29 November 1994 (1994-11-29) * column 6, line 1 - line 10; figure 1 *	5-7,10	
A	WO 97 07876 A (TOST RAINER ;HOFMANN LOTHAR (DE); MATHES WIELAND (DE); SCHOEPE DE) 6 March 1997 (1997-03-06) * page 6, line 25 - page 7, line 10; figures 1-3 *	1	
A	US 3 775 971 A (GADEFELT B) 4 December 1973 (1973-12-04) * figure 1 *	1	F01N B01D F02B
A	DE 38 21 832 C (HEINTZE WOLFGANG (DE)) 2 November 1989 (1989-11-02) * figures 1,2 *	1	
A	WO 96 36797 A (HOFMANN LOTHAR ;KLUMPP UDO (DE); MATHES WIELAND (DE); PFAFF OLIVER) 21 November 1996 (1996-11-21) * figure 1 *	1	
-/--			
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>20 June 2003</b>	Examiner <b>Morales, M</b>
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04C01)





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 31 1124

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 338 (M-1628), 27 June 1994 (1994-06-27) & JP 06 081631 A (ISUZU MOTORS LTD), 22 March 1994 (1994-03-22) * abstract; figures 1,2 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>20 June 2003</b>	Examiner <b>Morales, M</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 31 1124

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-06-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 08200047 A	06-08-1996	NONE	
EP 0898061 A	24-02-1999	DE 19736384 A1	25-02-1999
		EP 0898061 A2	24-02-1999
		TR 9801663 A2	21-06-1999
		US 6119448 A	19-09-2000
US 5367875 A	29-11-1994	NONE	
WO 9707876 A	06-03-1997	DE 19531028 A1	27-02-1997
		AT 177340 T	15-03-1999
		WO 9707876 A2	06-03-1997
		DE 59601432 D1	15-04-1999
		EP 0852512 A2	15-07-1998
		ES 2129991 T3	16-06-1999
		JP 11512165 T	19-10-1999
		RU 2141865 C1	27-11-1999
		US 5974789 A	02-11-1999
US 3775971 A	04-12-1973	SE 352136 B	18-12-1972
		DE 2216059 A1	12-10-1972
		GB 1342864 A	03-01-1974
DE 3821832 C	02-11-1989	DE 3821832 C1	02-11-1989
WO 9636797 A	21-11-1996	AT 173052 T	15-11-1998
		CA 2221340 A1	21-11-1996
		WO 9636797 A1	21-11-1996
		DE 59600784 D1	10-12-1998
		DK 826097 T3	19-07-1999
		EP 0826097 A1	04-03-1998
		ES 2124094 T3	16-01-1999
		JP 3118000 B2	18-12-2000
		JP 10509646 T	22-09-1998
		US 5943858 A	31-08-1999
JP 06081631 A	22-03-1994	NONE	

EPO FORM P449

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82